




**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

PCT/IB 03 / 0 3 8 3 6  
27.08.03

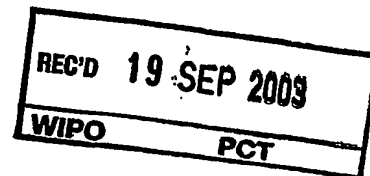

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

02292224.9

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**



Anmeldung Nr:  
Application no.: 02292224.9  
Demande no:

Anmeldetag:  
Date of filing: 11.09.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Apparatus for tilt correction of information carrier

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G11B7/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

**FIELD OF THE INVENTION**

The invention relates to an apparatus for reading or writing information on a circular information carrier having a periphery, said apparatus comprising a turntable for clamping and rotating said information carrier, said information carrier having an initial tilt from the radial direction of the turntable.

The invention may be used in the field of optical disc.

**BACKGROUND OF THE INVENTION**

A lot commercial information carriers (for example audio CD, RW and DVD optical discs) available in the market shows distortions and deformation in radial and tangential directions. Such defaults are mainly caused by the moulding process of optical discs that is not perfect, for example uneven cooling.

A common characteristic exhibited by these discs is a tilt in radial direction which value can be more or less important. The tilt causes the optic signals to deteriorate and increases jitter, leading to errors during reading or writing processes of the optical discs, especially with disc having an important tilt value.

To handle this problem, apparatus implementing known mechanisms for correcting the tilt of optical discs have been developed. In particular, a known solution consists in using actuators with 3 degrees of freedom that are servo-controlled. However, solutions based on such an active correction are expensive.

**OBJECT AND SUMMARY OF THE INVENTION**

It is an object of the invention to propose a cost-effective apparatus which allows to free itself from the tilt diversity of information carriers, and to ease the reading and writing processes for such information carriers.

To this end, the apparatus according to the invention is characterized in that said additional means comprise a cover having a circular ring intended to be in contact with the periphery of said information carrier when the cover is supported and clamped in said turntable.

Whatever the information carrier has a concave or a convex tilt, and whatever the value of the initial tilt of the information carrier, the tilt of the information carrier is forced to a known value in order to adapt the optical system to this known value. Bidirectional tilt of information carriers can thus be compensated and forced to a known value.

In a preferred embodiment, the apparatus is characterized in that said additional means comprise a cover having a circular ring intended to be in contact with the periphery of said information carrier when the cover is clamped in said turntable.

5 In an other preferred embodiment, the apparatus is characterized in that said additional means comprise a circular ring interdependent with said turntable, the circular ring ~~being intended to be in contact with the periphery of the information carrier when said~~ information carrier is clamped in said turntable.

10 In an other preferred embodiment, the apparatus is characterized in that said additional means comprise a wheel rotating freely around a shaft interdependent with said apparatus, said wheel being intended to be in contact with the periphery of said information carrier when said information carrier is clamped in said turntable.

15 In an other preferred embodiment, the apparatus is characterized in that it comprises :

- an optical pick-up unit intended to move along a guide shaft, said guide shaft being parallel to the radial direction of the turntable,
  - an actuator fixed on said optical pick-up unit and being centred on an optical axis, said
- 20 optical axis being perpendicular to the radial direction of said information carrier.

In an other preferred embodiment, the apparatus is characterized in that it comprises :

- an optical pick-up unit intended to move along a guide shaft, said guide shaft being
- 25 parallel to the radial direction of said information carrier,
- an actuator fixed on said optical pick-up unit and being centred on an optical axis, said optical axis being perpendicular to the radial direction of said information carrier.

30 When the tilt is forced to a known value, the shape of the information carrier along its radial direction is very close to line having a known angle with the radial direction of the turntable. The servo-control of the optical unit position is then easier if it translated along this axis, leading to a cost-effective solution.

35 In a preferred embodiment, the apparatus is characterized in that the turntable comprises an area for supporting said information carrier, said surface being tilted at said tilt of known value in the radial direction.

This feature allows to improve the tilt linearity of the information carrier along its radial direction.

Detailed explanations and other aspects of the invention will be given below.

#### **BRIEF DESCRIPTION OF THE DRAWING**

5           The particular aspects of the invention will now be explained with reference to the embodiments described hereinafter and considered in connection with the accompanying drawings, in which identical parts or sub-steps are designated in the same manner :

          Fig.1 depicts a first embodiment of an apparatus according to the invention comprising means for forcing the tilt of an information carrier,

10           Fig.2 depicts a second embodiment of an apparatus comprising means according to the invention for forcing the tilt of an information carrier,

          Fig.3 depicts a third embodiment of an apparatus comprising means according to the invention for forcing the tilt of an information carrier,

15           Fig.4 depicts a fourth embodiment of an apparatus comprising means according to the invention for forcing the tilt of an information carrier,

          Fig.5 depicts a fifth embodiment of an apparatus comprising means according to the invention for forcing the tilt of an information carrier as described in Fig. 1 and Fig.3,

20           Fig.6 depicts a sixth embodiment of an apparatus according to the invention comprising means for reading or writing on an information carrier which tilt is forced by means according to the invention,

          Fig.7 depicts a seventh embodiment of an apparatus according to the invention comprising means for reading or writing on an information carrier which tilt is forced by means according to the invention,

25           Fig.8 shows a three-dimensional view of means according to the invention for forcing the tilt of an information carrier.

#### **DETAILED DESCRIPTION OF THE INVENTION**

30           Fig.1 depicts a first embodiment of an apparatus APP according to the invention comprising means for forcing the tilt of an information carrier D.

          To ease the understanding of this figure and the following, only half of each element situated to the right of axis AA has been represented because of a circular symmetry around axis AA.

35           This apparatus comprises a turntable 101 for supporting, clamping and rotating an information carrier D around axis AA. The turntable 101 has a cylindrical shape and the radial direction R1 of said turntable is perpendicular to axis AA.

          The information carrier D has a circular periphery and corresponds for example to an optical disc. The information carrier is intended to be clamped in said turntable, for example

clamped or fitted in force on shaft 103. The turntable comprises a support area P for supporting the inner area of the information carrier.

5 The apparatus comprises a cover 102 centred on axis AA intended to be fitted into the turntable 101, for example by means of a magnet fitted onto the turntable attracting the cover having a guiding pin into locating hole and hole pin. The cover 102 is then interdependent with the turntable 101, itself interdependent with the information carrier D when clamped.

10 ~~To the flat plate of the cover, either made integral or fixed in, a circular ring RG1 at a distance r1 from axis AA, said cover being intended to be in contact with the outer periphery P1 of the information carrier D when the cover is clamped in the turntable. The cover being made of stiff material, when it is clamped in the turntable, the ring RG1 applies a vertical end load at the periphery P1 of said information carrier, forcing as a consequence the tilt of said information carrier to a known value. The slope of the information carrier in its radial direction R2 is quasi-linear between the support area P and the point P1.~~

15 The known value of the tilt depends on the bias value H corresponding to the height difference between a point P2 situated on the top of the inner information carrier surface, and the point P1. The radial direction R1 of the turntable and the radial direction R2 of the information carrier form a mean angle  $\beta$ .

20 Mean angle  $\beta$  can be approximated by its tangent expressed as the ratio  $H / (r1 - r2)$ . The mean angle  $\beta$  can also be known from simulations or experiments, the mean angle  $\beta$  corresponding to the mean slope of the tilt of the information carrier in relation to radial direction R1.

25 The range of the bias H defining the tilt is generally set up to a few tenths of millimetres, i.e. to a value higher than the largest initial tilt value of information carriers that can be found on the market. Then, whatever the initial tilt value of the information carrier (even null), and whatever this initial tilt is concave or convex, the tilt of the information carrier is forced to said known value when clamped in the apparatus according to the invention.

30 Additionally, the cover 102 comprises a circular ring RG2, either fixed or integral to the cover, at a distance r2 from axis AA, for pressing on point P2 the information carrier on the support area P of the turntable. Pressing the information carrier prevents the information carrier from slipping when rotating.

35 According to this embodiment, the tilt of the information carrier is concave (i.e. "n shape"), which implies that the optical system for reading or writing information on the information carrier is situated under the information carrier.

Fig.2 depicts a second embodiment of an apparatus APP comprising means according to the invention for forcing the tilt of an information carrier D.

The means used for forcing the tilt of the information carrier comprise a circular ring RG3 interdependent with the turntable 201, the circular ring being intended to be in contact with the periphery P1 of the information carrier when said information carrier is clamped in said turntable. The information carrier D is clamped in the turntable 201 similarly as in Fig.1.

5 The apparatus comprises a clammer 202 fixed in force in the turntable 201, for pressing on point P2 the information carrier on the support area P of the turntable. Pressing the information carrier at point P2 on the support area P limits a non-linear deformation of the information carrier in this area, and also prevents the information carrier from slipping in relation to the turntable when rotating.

10 According to this embodiment, the tilt of the information carrier is convex (i.e. "u shape"), which implies that the optical system for reading or writing information on the information carrier is situated above the information carrier.

15 Fig.3 depicts a third embodiment of an apparatus APP comprising means according to the invention for forcing the tilt of an information carrier D.

The means used for forcing the tilt of the information carrier comprise a wheel W rotating freely around a shaft SH1 interdependent with said apparatus, said wheel being intended to be in contact with the periphery P1 of said information carrier when said information carrier is clamped in said turntable. Contrary to embodiments depicted in Fig.1 and Fig.2 where the end load is applied at the same instant all along the outer periphery of the information carrier, the end load is there applied at a given instant only at one point of the periphery of the information carrier. The tilt of the information carrier is then forced at a known value only in the radial direction that crossing the point P1.

25 According to this embodiment, the tilt of the information carrier is concave (i.e. "n shape"), which implies that the optical system for reading or writing information on the information carrier is situated under the information carrier.

Of course, the wheel W and shaft SH1 can also be fixed to the apparatus symmetrically to radial direction R1 so that the tilt of the information carrier becomes convex.

30 Fig.4 depicts a fourth embodiment of an apparatus APP comprising means according to the invention for forcing the tilt of an information carrier D.

This embodiment differs from the embodiment depicted in Fig.1 in that the cover 402 comprises a curved ring RG4 for applying a vertical end load at the periphery P1 of said information carrier.

35 According to this embodiment, the tilt of the information carrier is convex (i.e. "u shape"), which implies that the optical system for reading or writing information on the information carrier is situated under the information carrier.

Fig.5 depicts a fifth embodiment of an apparatus APP comprising means according to the invention for forcing the tilt of an information carrier D as described in Fig. 1 and Fig.3.

For improving the linearity of the tilt of the information carrier in the radial direction R2 when clamped in the turntable 501, in particular for improving the linearity in the support area P corresponding to a flexion area, the support area P of the turntable 501 is tilted to the same value than the tilt of the information carrier. As shown in the zoom of the turntable 501, the slope of the support area P is then tilted with mean angle  $\beta$ .

Fig.6 depicts a sixth embodiment of an apparatus APP according to the invention comprising means for reading or writing on an information carrier D which tilt is forced by means according to the invention.

This apparatus comprises an optical pick-up unit OPU intended to move along a guide shaft SH2, said guide shaft being parallel to the radial direction R1 of the turntable 101.

This apparatus also comprises an actuator ACT fixed on said optical pick-up unit OPU, said actuator comprising optical means such as lens for reading or writing data on the information carrier D. The actuator is centred on an optical axis BB, said optical axis BB being perpendicular to the radial direction R2 of said information carrier. In other words, the optical axis BB is tilted with the mean angle  $\beta$  from axis AA.

When the optical pick-up unit translates along shaft SH2, the optical axis BB of the actuator remains perpendicular to the information carrier, which eases the positioning servo-control of the actuator.

Fig.7 depicts a seventh embodiment of an apparatus APP according to the invention comprising means for reading or writing on an information carrier D which tilt is forced by means according to the invention.

This apparatus comprises an optical pick-up unit OPU intended to move along a guide shaft SH2, said guide shaft being parallel to the radial direction R2 of the information carrier D.

This apparatus also comprises an actuator ACT fixed on said optical pick-up unit OPU, said actuator comprising optical means such as lens for reading or writing data on the information carrier D. The actuator is centred on an optical axis BB, said optical axis BB being perpendicular to the radial direction R2 of said information carrier. In other words, the optical axis BB is tilted with the mean angle  $\beta$  from axis AA.



When the optical pick-up unit translates along shaft SH2, the optical axis BB of the actuator remains perpendicular to the information carrier, which eases the positioning servo-control of the actuator.

5 Means for reading or writing on an information carrier D as depicted in Fig.6 and 7 can be used in relation with embodiments depicted in Fig.1, 3, 4 and 5. Of course, such means for reading or writing on an information carrier D, if placed symmetrically to the radial direction R1 can also be used in embodiment depicted in Fig.2.

10 Fig.8 shows a three-dimensional view of means according to the invention for forcing the tilt of an information carrier D.

Such means are symmetric around axis AA, in particular turntable 801, support area P, cover 802, information carrier D, ring RG1 and ring RG2.

15 The apparatus according to the invention may be used in optical systems for reading and/or writing information on information carriers conforming to audio/video, CD/DVD, reading, recording or rewriting optical discs.

20

**CLAIMS**

1. Apparatus for reading or writing information on a circular information carrier having a periphery, said apparatus comprising a turntable for clamping and rotating said information carrier, said information carrier having an initial tilt from the radial direction of the turntable,  
5 **characterized in that** said apparatus comprises additional means for giving an end load at the periphery of said information carrier, so as to force a tilt of known value to said information carrier from the radial direction of the turntable, said known value being larger than said initial tilt.
- 10 2. Apparatus as claimed in claim 1 **characterized in that** said additional means comprise a cover having a circular ring intended to be in contact with the periphery of said information carrier when the cover is clamped in said turntable.
- 15 3. Apparatus as claimed in claim 1 **characterized in that** said additional means comprise a circular ring interdependent with said turntable, the circular ring being intended to be in contact with the periphery of the information carrier when said information carrier is clamped in said turntable.
- 20 4. Apparatus as claimed in claim 1 **characterized in that** said additional means comprise a wheel rotating freely around a shaft interdependent with said apparatus, said wheel being intended to be in contact with the periphery of said information carrier when said information carrier is clamped in said turntable.
- 25 5. Apparatus as claimed in claims 2, 3 or 4 **characterized in that** said apparatus comprises :
  - an optical pick-up unit intended to move along a guide shaft, said guide shaft being parallel to the radial direction of the turntable,
  - an actuator fixed on said optical pick-up unit and being centred on an optical axis, said  
30 optical axis being perpendicular to the radial direction of said information carrier.
- 35 6. Apparatus as claimed in claims 2, 3 or 4 **characterized in that** said apparatus comprises :
  - an optical pick-up unit intended to move along a guide shaft, said guide shaft being parallel to the radial direction of said information carrier,
  - an actuator fixed on said optical pick-up unit and being centred on an optical axis, said optical axis being perpendicular to the radial direction of said information carrier.

7. Apparatus as claimed in claim 1 **characterized in that** the turntable comprises an area for supporting said information carrier, said surface being tilted at said tilt of known value in the radial direction.

**"Apparatus for tilt correction of information carrier"****ABSTRACT**

5 The invention relates to an apparatus for reading or writing information on a circular  
information carrier having a periphery, said apparatus comprising a turntable for clamping and  
rotating said information carrier, said information carrier having an initial tilt from the radial  
direction of the turntable. The apparatus comprises additional means for giving an end load at  
the periphery of said information carrier, so as to force a tilt of known value to said information  
10 carrier from the radial direction of the turntable, said known value being larger than said initial  
tilt.

Use : Optical reading/writing

Ref : Fig.1

APP

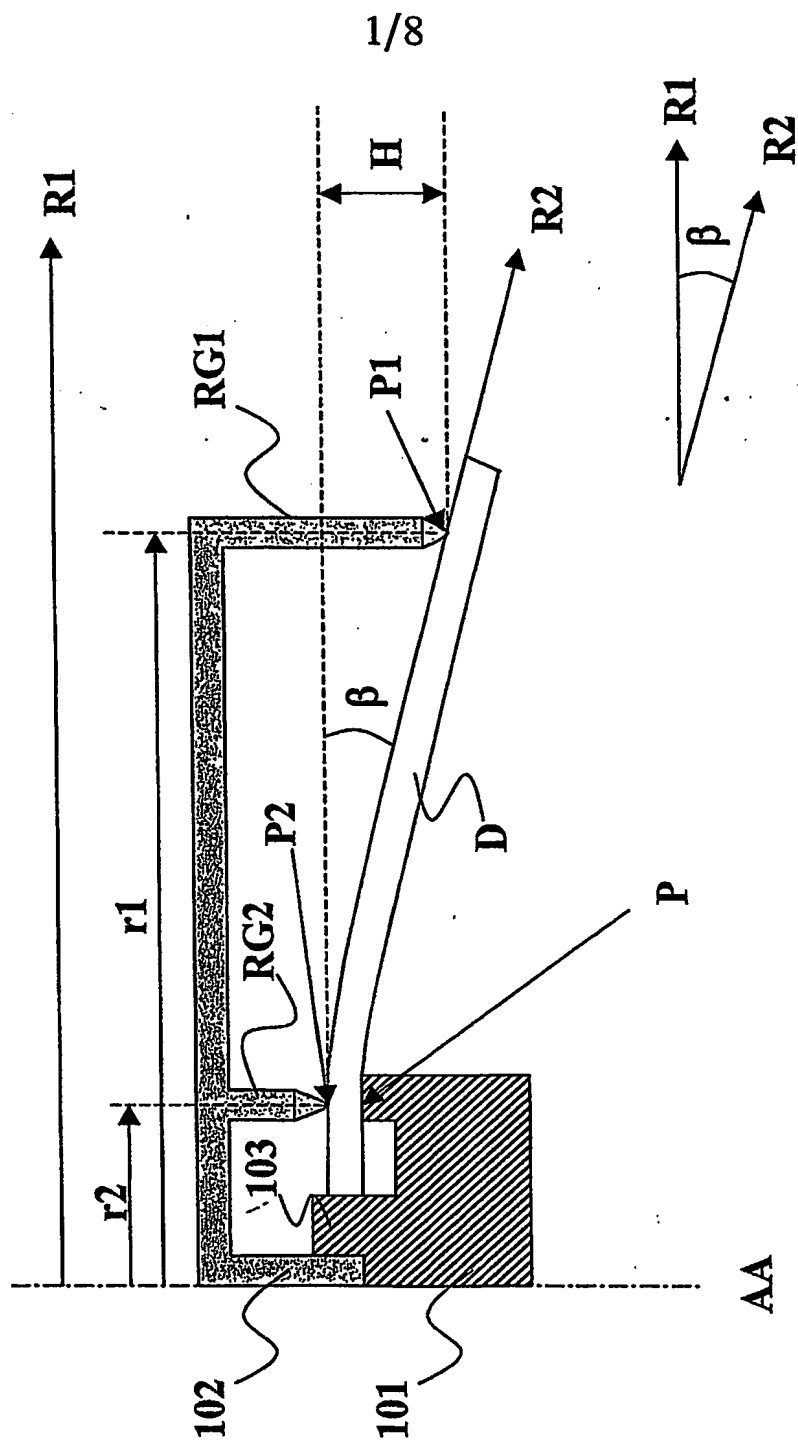


FIG.1


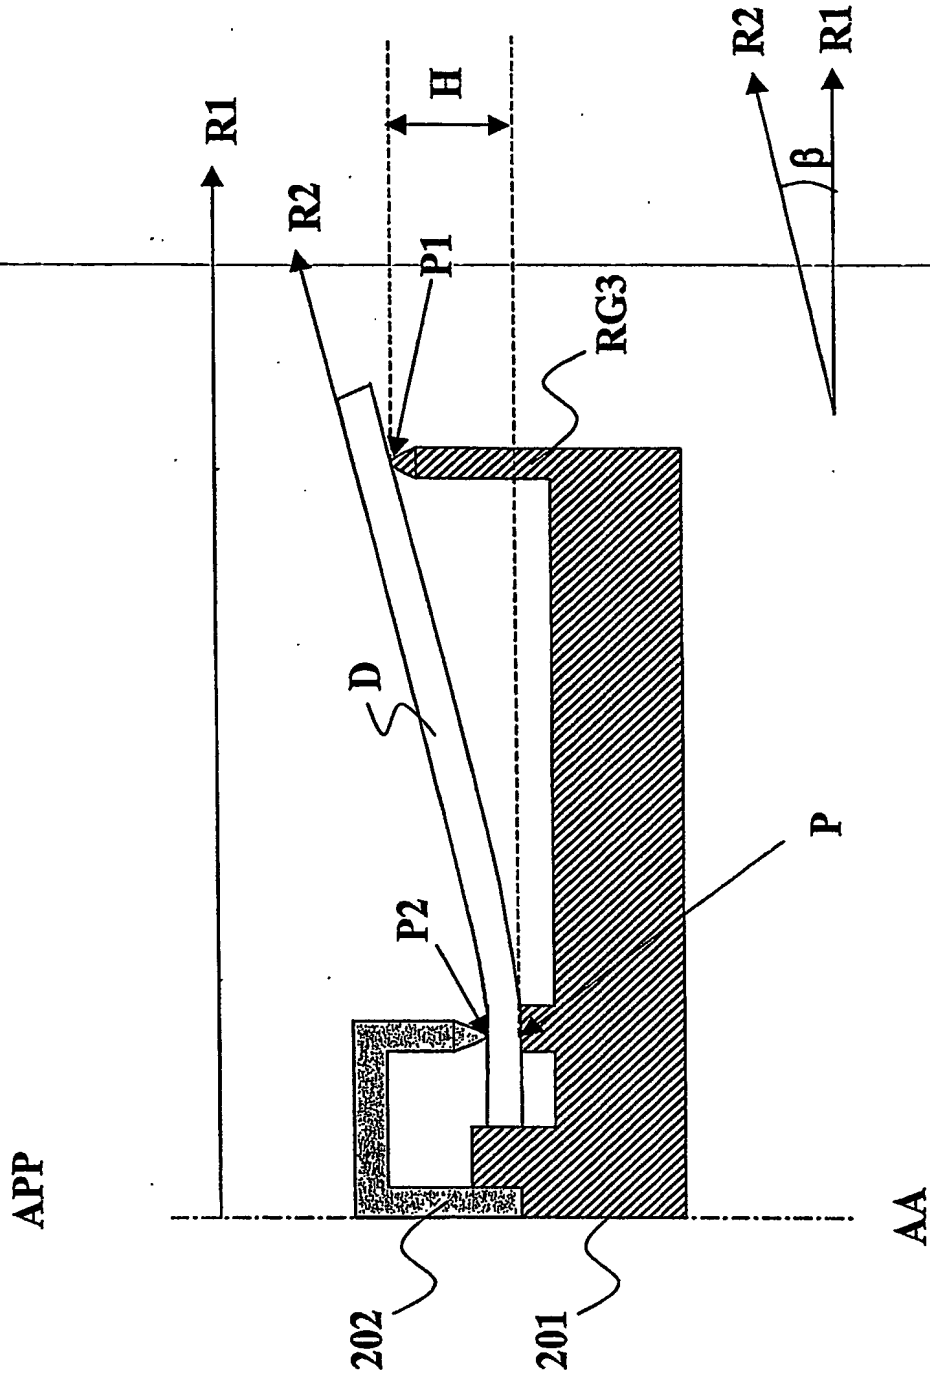


FIG.2

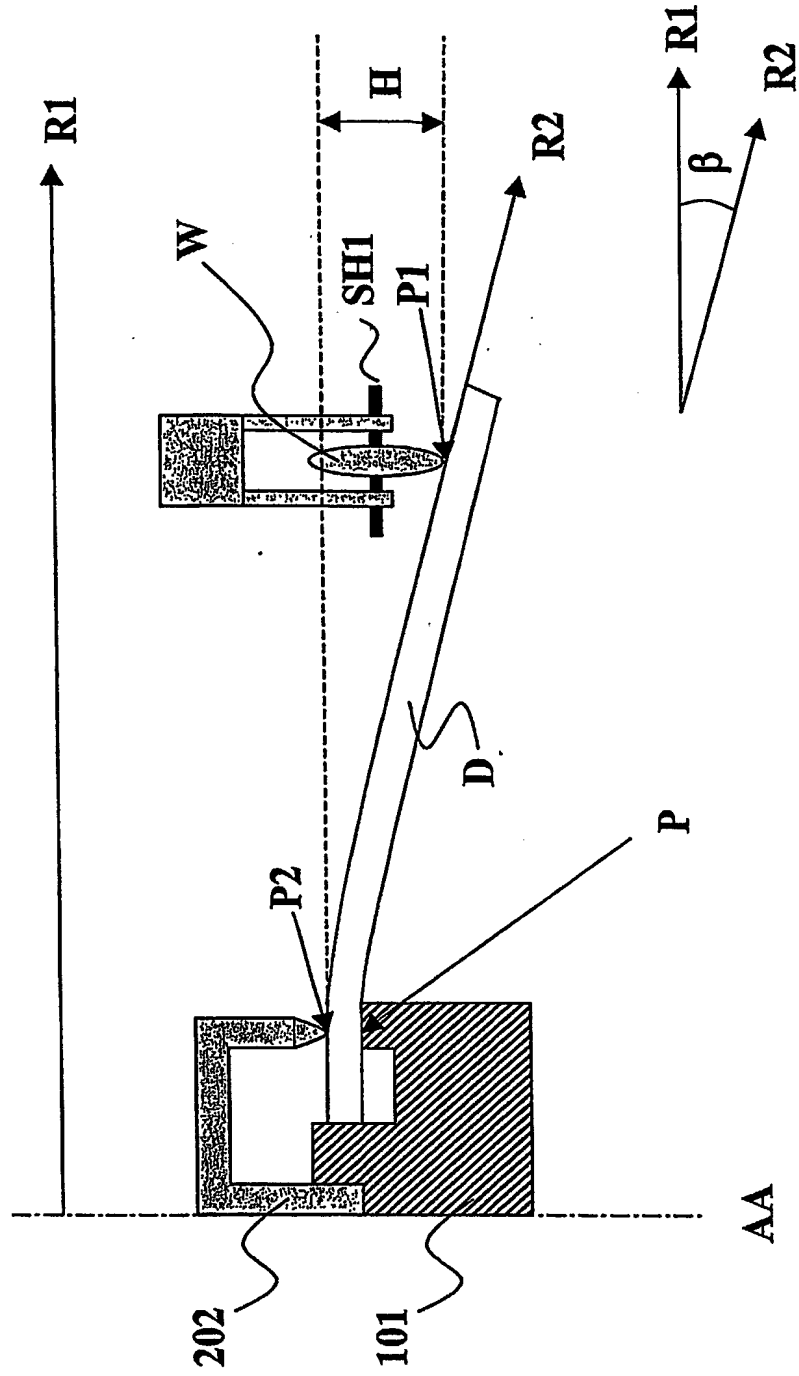

# FIG.3



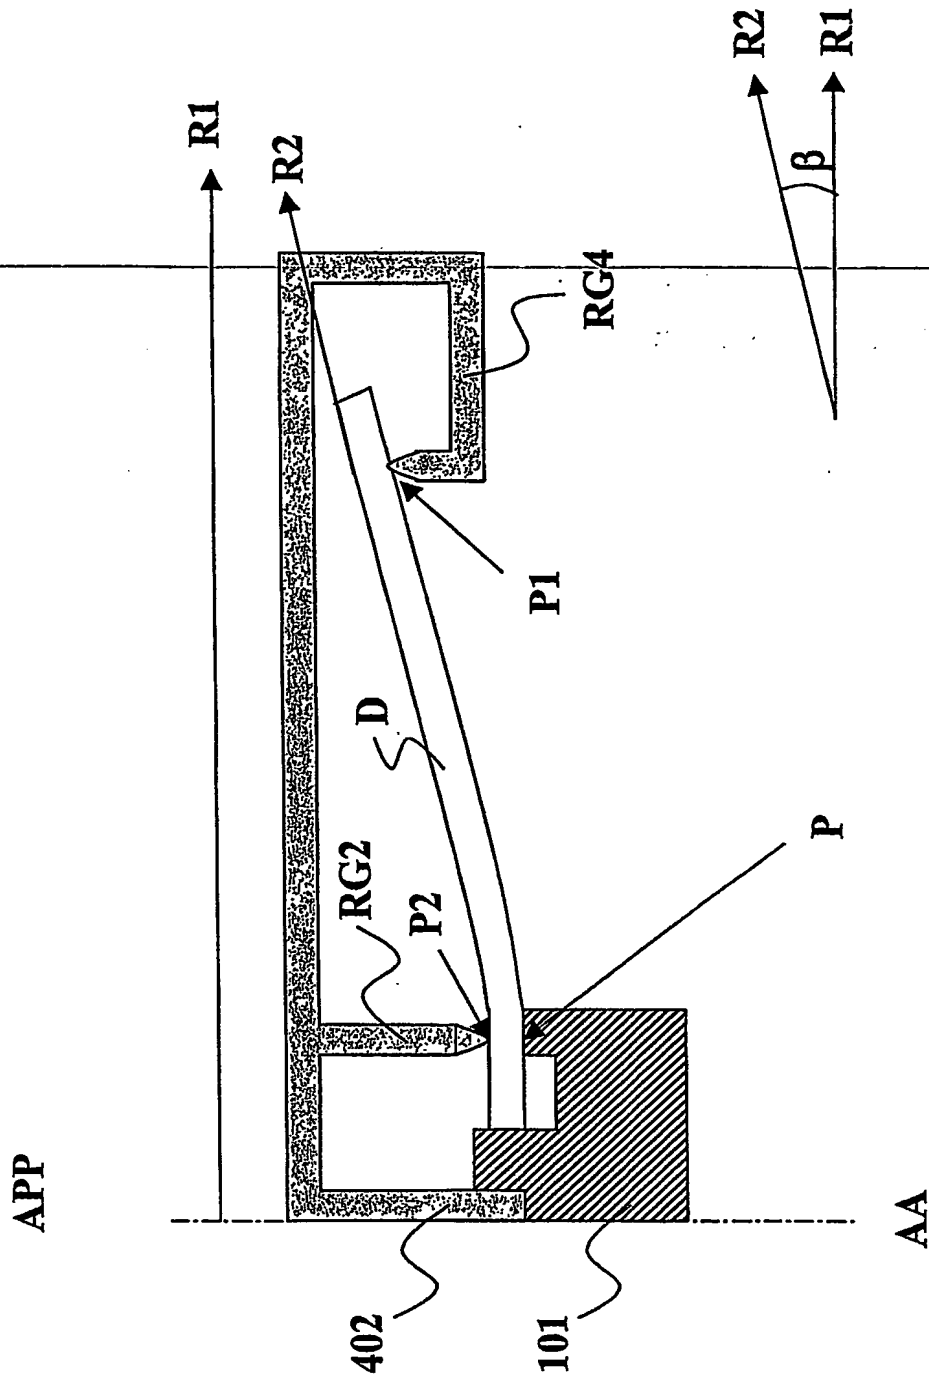


FIG. 4




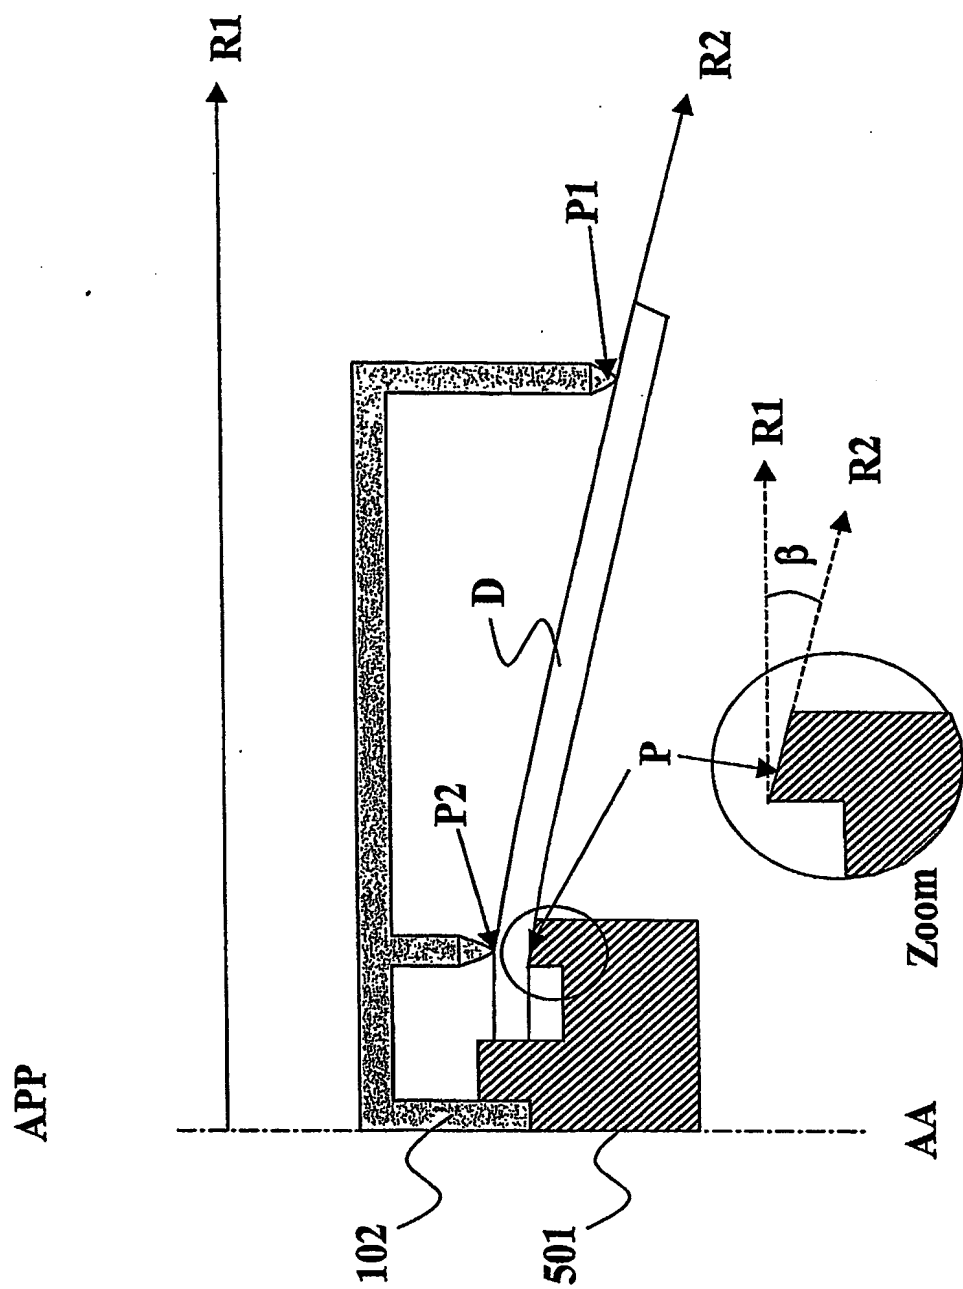


**FIG. 5**

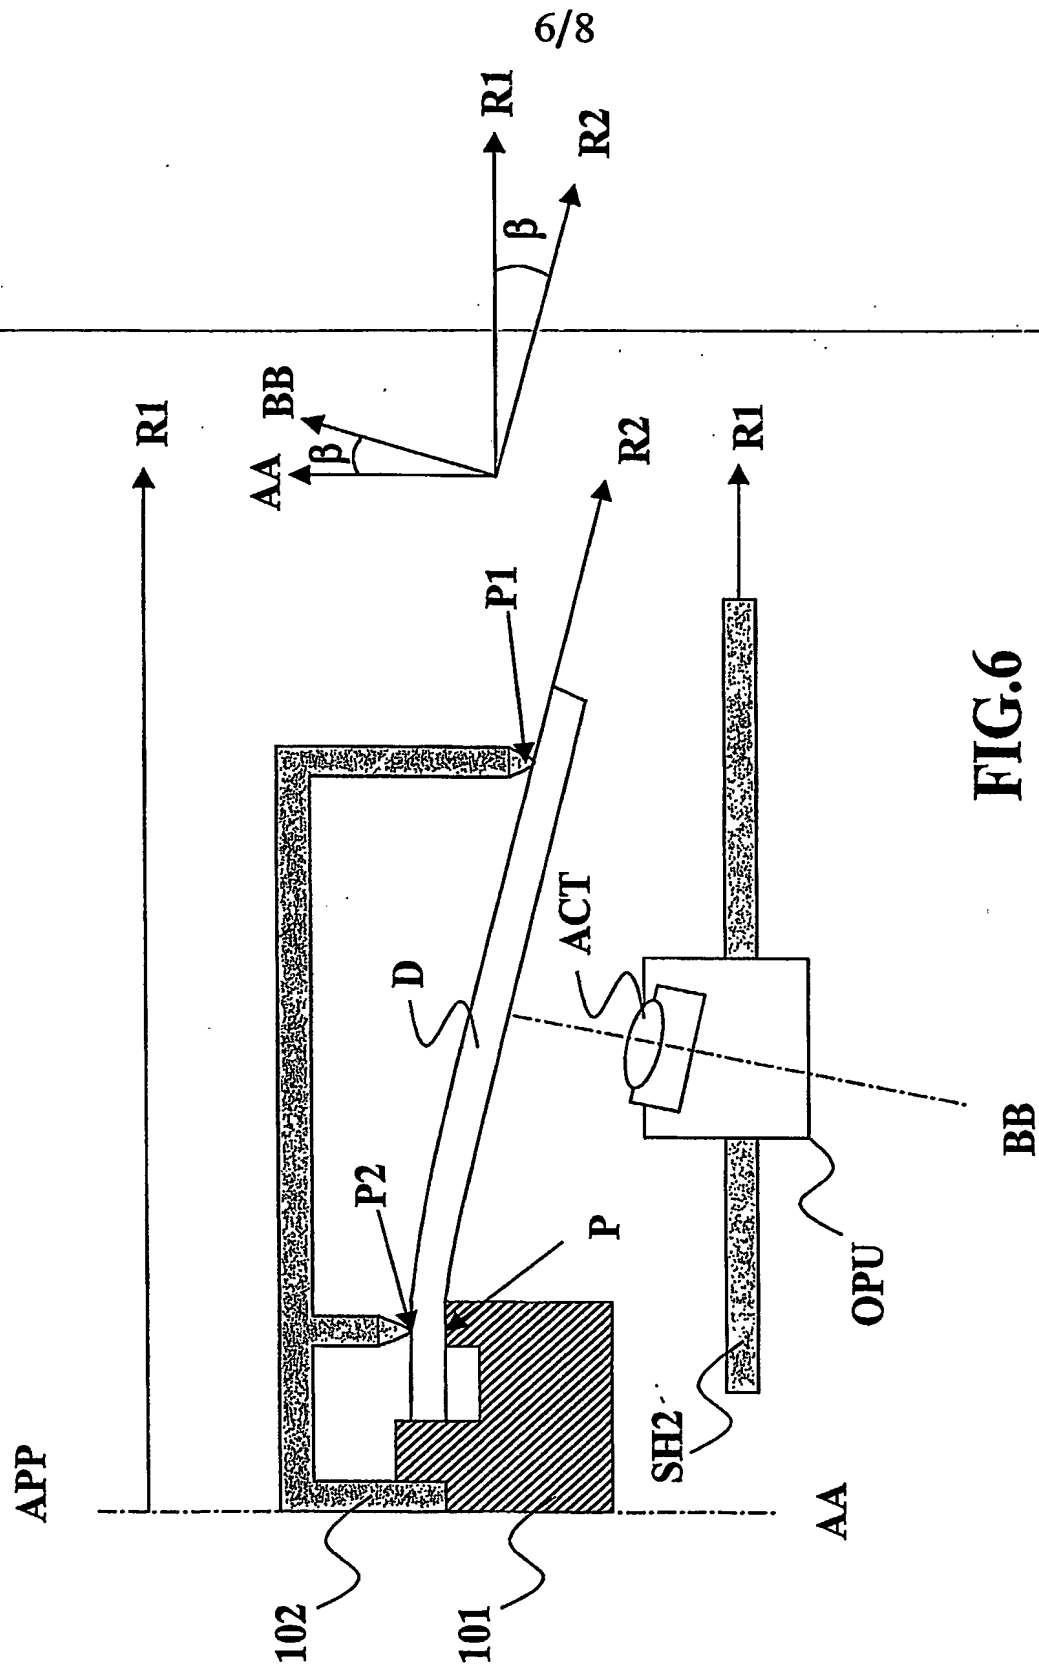

**FIG.6**

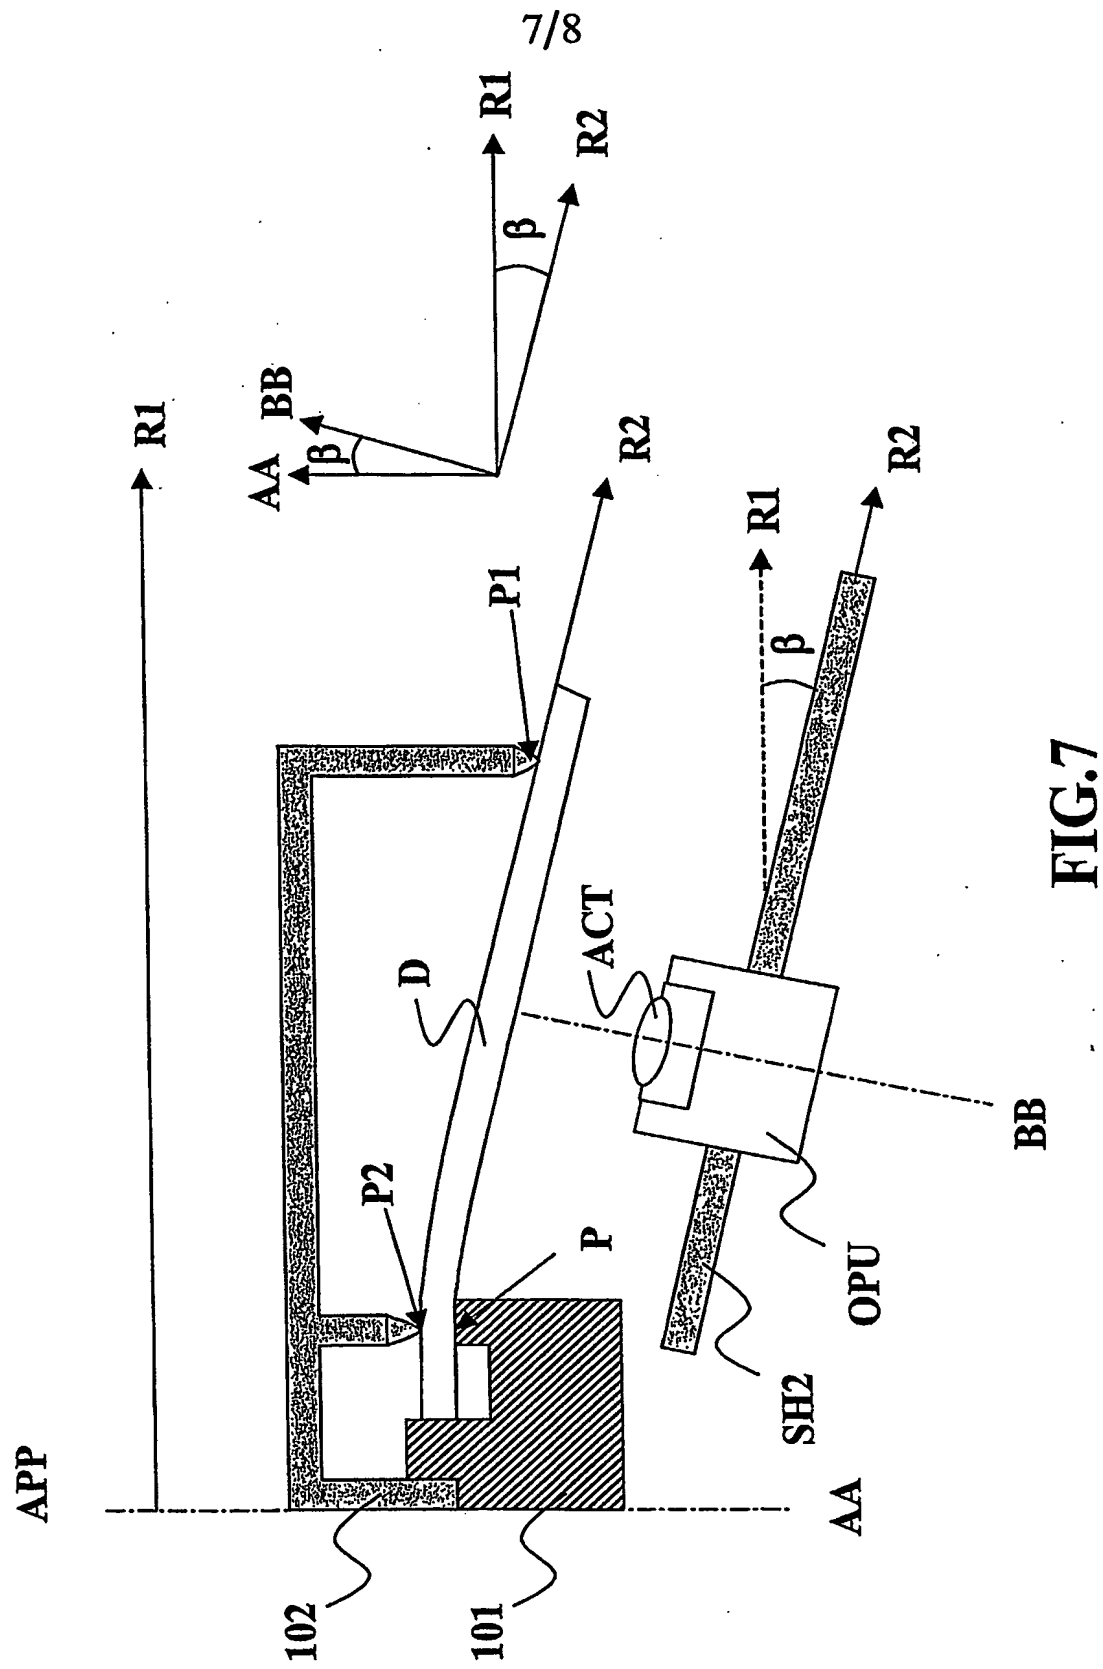

**FIG.7**

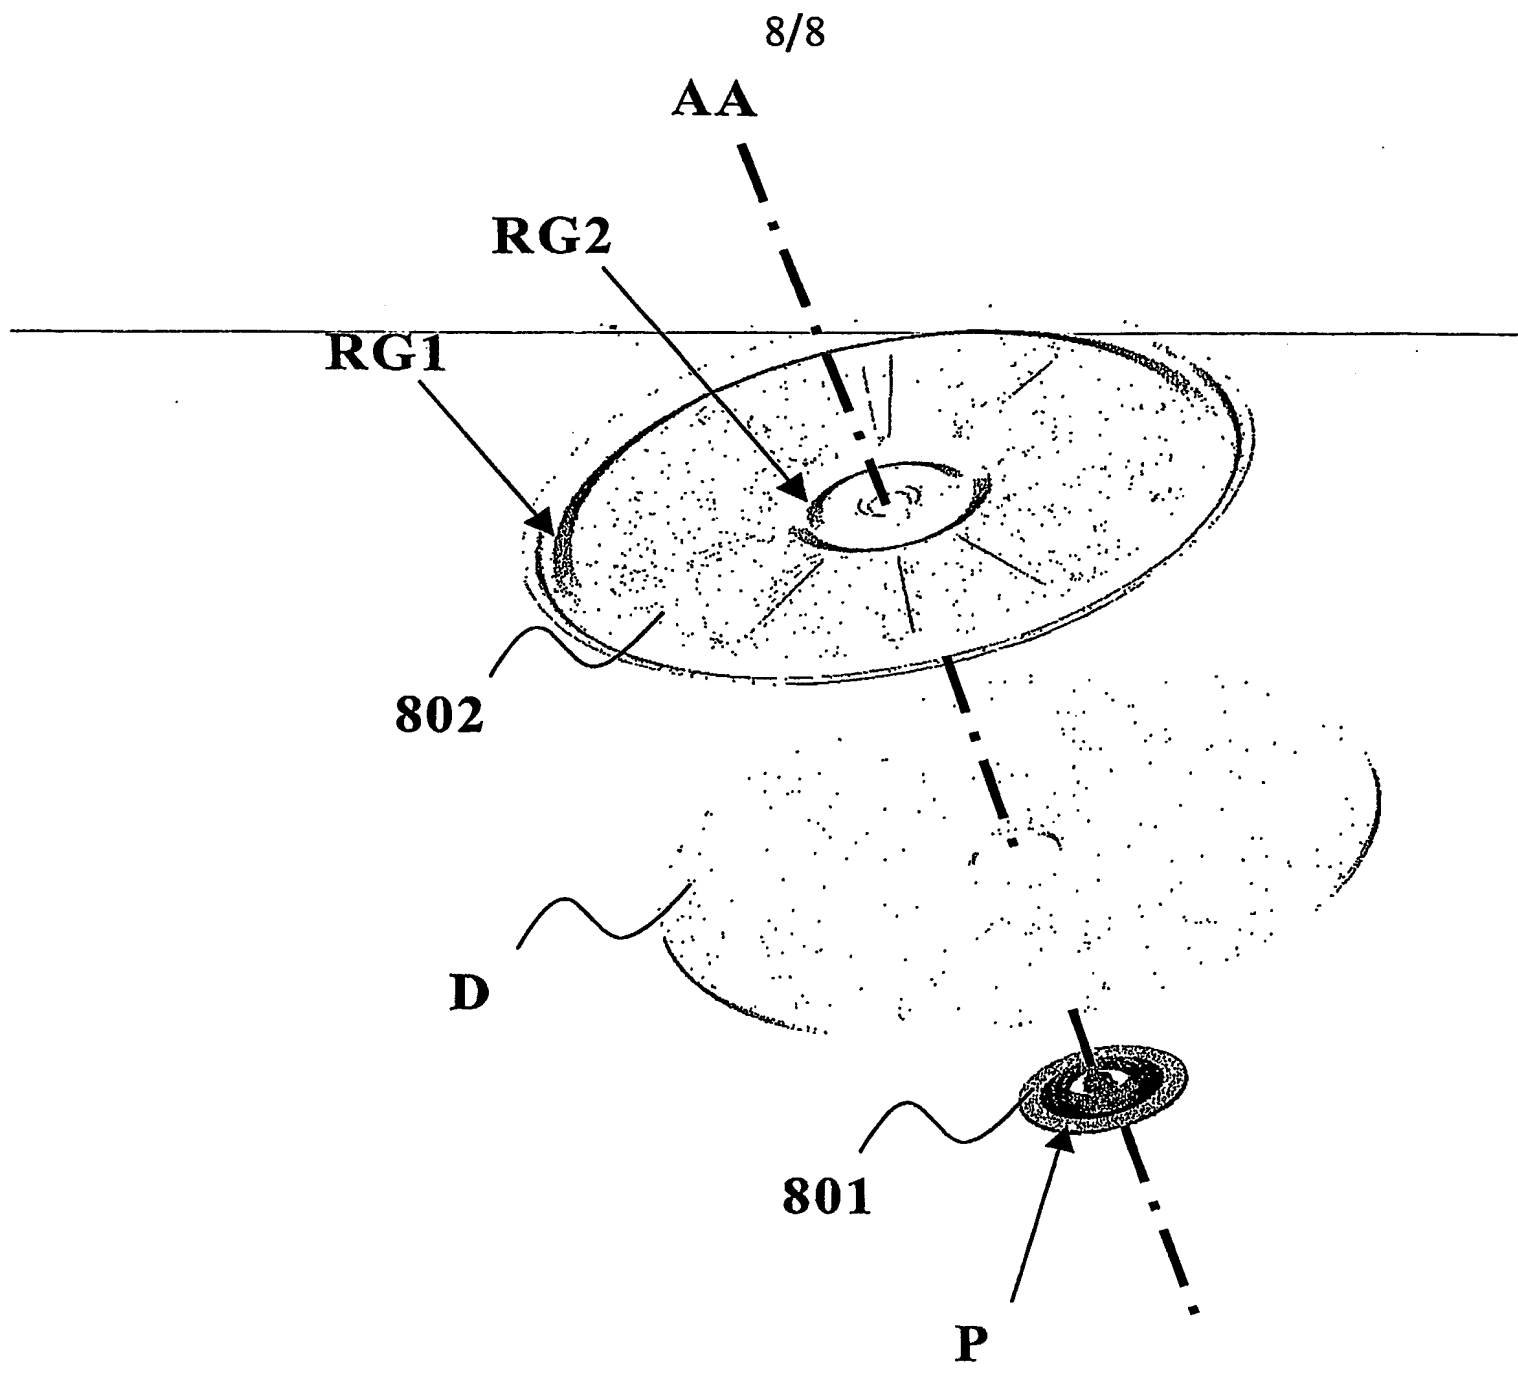

**FIG.8**